


Code: KMPTF5DECO

TF5 ECO is ideal for cutting flexible hydraulic hoses up to 3" six spirals
Blowing kit and fume extractor upon request.



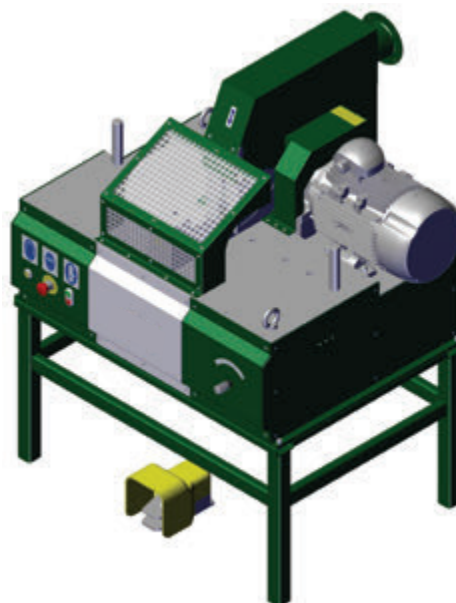

◀ PROTECTION








TECHNICAL DATA

6 SPIRALS	3"
4 SPIRALS	3"
2 BRAIDS	3"
INDUSTRIAL HOSE	4"
MAX Ø	160 mm (6.299")
REVOLUTIONS/MINUTE	2900
PNEUMATIC INPUT	MAX 7 Bar (100 Psi)
BLADE Ø	520 mm (20.472")
STANDARD VOLTAGE	400V 50HZ 3PH
DIMENSIONS LxWxH	1065x1020x770 mm (41.929"x40.158"x30.315")
WEIGHT	355 Kg (783 Lbs)
MOTOR POWER	7.5 Kw (10 Hp) - A= 13,35

INCLUDED ACCESSORIES

SAFETY PROTECTIONS	
SUCTION CONNECTION	

OPTIONAL

STROKE COUNTER	
MEASURING HOSE HOLDER	
CENTRING DEVICE + METER COUNTER (MAX 2")	
BASE	
FUME EXTRACTOR	
BLOWING KIT	
SPECIAL VOLTAGES AVAILABLE	

Product specifications could be modified without prior notice.