


**PH308 - SEWER JET - 3600 / 4000 PSI**

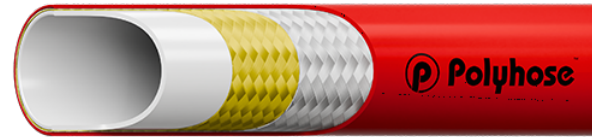

**Construction**

- Inner tube** Special Polyurethane
- Reinforcement** One or more braids of Aramid Fiber and one special braid or synthetic fiber armoring
- Cover** Polyurethane, Red Colour
- Application** Extreme flexibility at low temperature owing to special inner tube material and light weight reinforcement. Bonded construction to resist kinking. Resists cuts, abrasion and microbiological degradation. Available in long lengths

**Note :**

- Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH308-08	-08	12	1/2	12.7	0.810	20.6	4000	275	16000	1100	3.1	80	260
PH308-12	-12	20	3/4	19.0	1.150	29.2	3600	250	9000	625	4.5	115	435
PH308-16	-16	25	1	25.4	1.440	36.6	3600	250	9000	625	5.3	135	700
PH308-20	-20	32	1.1/4	31.8	1.800	45.7	3600	250	9000	625	8.3	210	975



**Temperature Range** : Continuous: -40°C to +60°C