


PH309 - SEWER JET - 3000 PSI

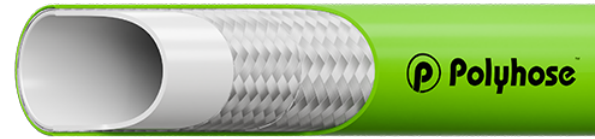

Construction

- Inner tube** Special Polyurethane
- Reinforcement** One or more braids of synthetic fiber and one special braid of synthetic fiber armoring
- Cover** Polyurethane, Green Colour
- Application** Used for sewer cleaning, bonded construction to resist kinking. Resists cuts, abrasion and microbiological degradation. Available in long lengths

Note :

- Special colours available on request

| Item Code | Dash Size | DN | ID | | OD | | WP | | BP | | BR/r | | W |
|-----------|-----------|----|-------|------|-------|------|------|-----|------|-----|------|-----|------|
| | | | inch | mm | inch | mm | psi | bar | psi | bar | inch | mm | g/m |
| PH309-08 | -08 | 12 | 1/2 | 12.7 | 0.890 | 22.6 | 3000 | 210 | 7600 | 525 | 3.3 | 85 | 290 |
| PH309-12 | -12 | 20 | 3/4 | 19.0 | 1.190 | 30.2 | 3000 | 210 | 7600 | 525 | 4.5 | 115 | 490 |
| PH309-16 | -16 | 25 | 1 | 25.4 | 1.475 | 37.5 | 3000 | 210 | 7600 | 525 | 5.9 | 150 | 735 |
| PH309-20 | -20 | 32 | 1.1/4 | 31.8 | 1.830 | 46.5 | 3000 | 210 | 6800 | 475 | 9.3 | 235 | 1160 |



Temperature Range : Continuous: -40°C to +60°C