
PH347 - SUPER HIGH PRESSURE PAINT SPRAY

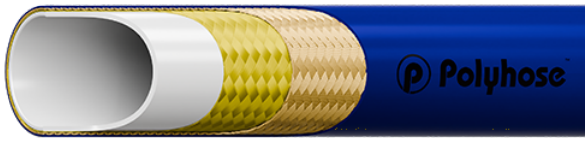

Construction

Inner tube	Polyamide
Reinforcement	One or more Braids of Aramid fiber with single braid of steel wire
Cover	Polyurethane, Blue Colour
Application	Very high pressure Airless paint spray systems for 300 to 700 bar. Suitable for applications requiring chemical resistance to solvents and aggressive fluids

Note :

- Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH347-04	-04	06	1/4	6.4	0.540	13.7	10000	700	40000	2800	2.8	70	240
PH347-06	-06	10	3/8	9.5	0.740	18.8	10000	700	40000	2800	4.0	100	381
PH347-08	-08	12	1/2	12.7	0.880	22.4	7500	520	30000	2080	7.1	180	510
PH347-12	-12	20	3/4	19.0	1.150	29.2	5000	345	20000	1380	7.5	191	760
PH347-16	-16	25	1	25.4	1.440	36.6	4350	300	17400	1200	10.0	254	1405

Temperature Range : Continuous: -40°C to +100°C Temp. not to exceed +70°C for Air and Water based fluids