


PH61A LOW TEMPERATURE OIL SUCTION & DISCHARGE HOSE W.P. 10 BAR

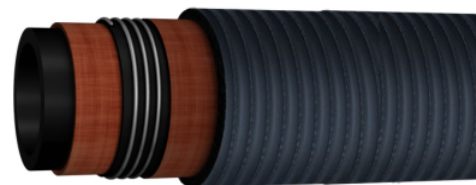

Construction

Inner tube	Black colour, synthetic rubber resistant to oil
Reinforcement	Plies of synthetic textile cords with steel helix and two cross anitstatic copper wires
Cover	Black colour synthetic rubber, with a corrugated cover for increased flexibility and resistant to abrasion, oil and ozone
Application	Oil suction and discharge hose for handling gasoline or petrol, oil, diesel with 50% aromatic content, the hose is corrugated which is very good solution where there is a need of flexible hose

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	kg/m
PH61A-16	-16	25	1	25.4	1.34	34	150	10	435	30	3.5	90	0.66
PH61A-20	-20	32	1.1/4	32	1.57	40	150	10	435	30	4.7	120	0.819
PH61A-24	24	38	1.1/2	38	1.81	46	150	10	435	30	5.3	135	0.988
PH61A-32	-32	51	2	51	2.36	60	150	10	435	30	6.7	170	1.281
PH61A-48	-48	76	3	76	3.54	90	150	10	435	30	13.8	350	2.982



Temperature Range : Continuous: -55°C to +100°C