



KRIMPMATIC H135 ES


CRIMPING (STANDARD VOLUME CRIMPING)

Code: KMPH135ES

Krimpmatic H135 ES is ideal for crimping hydraulic hoses up to 2" six spirals and up to 3" industrial hose.

MAIN FEATURES

- Ideal for crimping any type of fitting;
- ES3 Siemens PLC control with 5.7" color touch-screen display;
- Back limit switch.

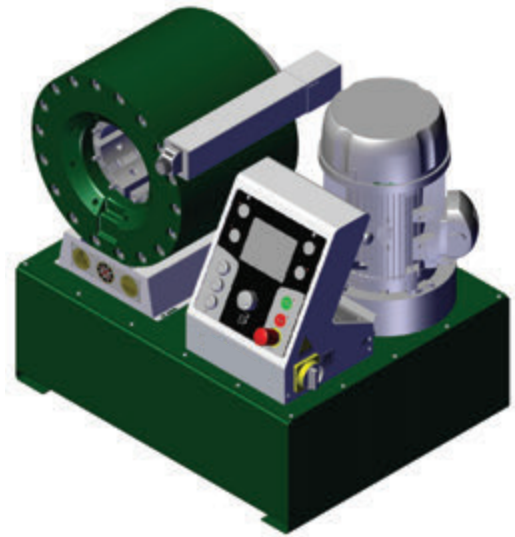

◀ ES3 ELECTRONIC CONTROL WITH TOUCH SCREEN

TECHNICAL DATA



CRIMPING FORCE	315 TON (345 US TONS)
6 SPIRALS 2 PIECES	2"
INDUSTRIAL HOSE	3"
MAX Ø	135 mm (5.315")
CRIMPING/HOUR	865
DIE OPENING	Ø + 43 mm (Ø + 1.693")
90° FITTING	2"
STANDARD VOLTAGE	375V-420V 50HZ 3PH
MOTOR POWER	5.5 Kw (7.5 Hp) - A= 10,64
DIMENSIONS LxWxH	820x750x820 mm (32.283"x29.528"x32.283")
WEIGHT WITHOUT OIL	475 kg (1047 Lbs)
OIL	110 Lt.

INCLUDED ACCESSORIES



ELECTRONIC CONTROL WITH TOUCH SCREEN - ES3	
FINE CORSA POSTERIORE BACK LIMIT SWITCH	

OPTIONAL



CRIMPING SPEED CONTROL SYSTEM	
PRESSURE CONTROL SYSTEM KIT	
USB KIT	
QUALITY CHECK: PRESSURE AND DIAMETER COMBINED CONTROL	
MULTISTEP CRIMPING DIAMETERS	
DISPENSER + PATENTED QUICK CHANGE	
BASE	
ELECTRIC PEDAL	
MARKING DIES (15 CHAR.)	
SPECIAL DIES	
BACK MIRROR	
CLEANING AND MAINTENANCE KIT	
SPECIAL VOLTAGES AVAILABLE	

WITH SPECIAL DIES Ø 104 MM UPON REQUEST | THEORETICAL WITH 1/2" Δ Ø 6 MM HOSE

Product specifications could be modified without prior notice.