


**PH906RR - 6 SPIRALS OF HIGH TENSILE STEEL WIRE**

**Construction**


**Inner tube** Polyoxymethylene (POM)  
**Reinforcement** 6 Spirals of high tensile steel wire  
**Cover** Polyamide (PA)

**Application** Water blast: Heat exchanger tube cleaning, surface preparation (concrete removal, surface cleaning of the buildings, paint removal), tank and vessel cleaning, ultra high-pressure water jet cutting and hydro demolition (cutting and demolition of armoured concrete, pipelines, paper or steel) Hydraulics: Pressure test equipment (valves, tooling and control panels)

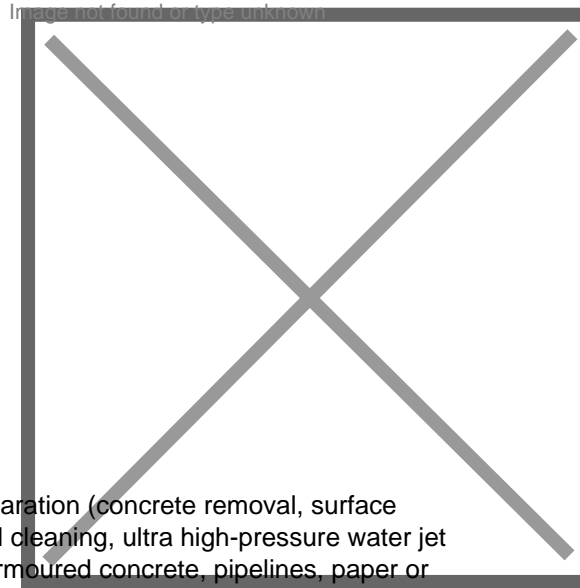

Item sfdag Code	DN	ID		OD		WP		BP		BR/r		W
		inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH906RR-05	8	5/16	7.6	0.760	19.3	40600	2800	101500	7000	11.8	300	1055

**WJTA-IMCA Color Coding Scheme for Pressure Hoses - Maximum Working Pressure Applicable**



**Temperature Range** : Continuous : -30°C to +70°C