

INTERNATIONAL CENTRE FOR AUTOMOTIVE TECHNOLOGY

[A Division of NATRiP Implementation Society (NATIS), Govt. of India]

Innovation • Service • Excellence

NON TRANSFERABLE

TEST REPORT (Extension Report)

C T 2 L L 0 0 4 7

Date: 21.01.2016

1.0 NAME AND ADDRESS OF
THE CUSTOMER

M/s. Polyhose India(Rubber) Pvt. Ltd.
F37-F42 & F50-F55, SIPCOT Industrial Park,
Irrungattukottai, Pennalur Post, Sriperumpudur
Taluk- 602117, Tamil Nadu, India

2.0 CUSTOMER LETTER REF. : CCTEPOIPKNCEL42538 Dated 17-Dec-2015

3.0 DESCRIPTION OF COMPONENT :

1	Name of the component	CNG Low Pressure Flexible Hose
2	Name and address of the manufacturer	Same as Sr. No. 1.0
3	Dimensions of the component	ID= 7.5 mm, OD = 14.27 mm
4	Drawing No	PHIRPL/05-CNG/8-15
5	Markings	ID 5/16", MAX WP 21.5 BAR

4.0 TEST OBJECTIVE :

The above said customer approached ICAT for the extension of validity of the earlier test report no. CT0CF0766 dated 27.04.2010 of CNG Low Pressure Flexible Hose from standard SAE J30 R6 and AIS 028 to IS 15722:2006 with a different internal and outer diameter.

5.0 JUSTIFICATION FOR EXTENSION:

The parameters that are considered for extending the validity of the earlier test reports mentioned in Sr. No. 4.0 are:

1) The Customer's declaration regarding use of same material, material source and material grade, process parameters, its controls parameters, etc. are identical for manufacturing of CNG Low Pressure Flexible Hose except for the internal and outer diameter.


2) Change in applicable reference test standards from SAE J30 R6 to IS 15722:2006 and based on identical test and acceptance criteria.

Therefore extension may be given after verification of the test reports submitted by the customer and after conducting burst test as per clause no. 5.2 of IS 15722:2006.

6.0 CONCLUSION:

Based on the declaration submitted by the customer and after verification of the test report No. CT0CF0766 dated 27.04.2010, CNG Low Pressure Flexible Hose specified in Sr. no. 3.0 of this test report meets the requirements of all the tests as per IS 15722:2006. Test Results for burst test attached in annexure I. Therefore the extension is granted.

*Note: 1) This report shall be read along with Test Report No. CT0CF0766 dated 27.04.2010

Prepared By 	Checked By 	 	Department Head
UDIT KAUL	MAHENDAR PAL		MADHUSUDAN JOSHI
			Page 1 of 3 (42538)

Office Address : Plot No.-26, Sector-3, HSIIDC, IMT-Manesar, Gurgaon-122050. Haryana (India)

Phone : 0124-4586111, Fax : +91-124-2290005. E-mail: team@icat.in, Website : www.icat.in

(An ISO 9001, ISO 14001 and OHSAS 18001 certified, scope wise NABL accredited and BIS recognised Test House)

DISCLAIMER

1. ICAT issues Test reports/ Extension reports/ Developmental Reports for vehicles/ parts/ components/ assemblies etc. based on the documents produced and/or prototype / vehicle(s) or sample(s) submitted by the applicant and testing thereof.
2. ICAT issues Test reports/ Extension reports/ Developmental Reports in compliance to Motor Vehicle Act/ Central Motor Vehicle Rules and their provisions as amended from time to time or any other statutory orders under which ICAT is authorized. Other Rules/Acts are outside the purview/scope of the Test reports/Extension reports/ Developmental test reports
3. Test(s) on prototype/ vehicle(s)/ sample(s) is/are carried out on the basis of standard procedures as notified under specific rules/ requested by the applicant. Results of such tests are property of bearer of Test Reports/ Extension Reports / Developmental test reports. These results cannot be disclosed unless specifically so ordered by Government, Court, etc
4. Unless otherwise supported by a separate Certificate, this Test report Extension Reports / Developmental test reports shall not be considered in isolation as valid Type approval for any vehicle
5. ICAT is not responsible for testing each vehicles/ parts/assemblies etc. for which Test Reports/ Extension reports/ Developmental test reports is issued. Further, ICAT is not responsible for ensuring manufacturing quality of the vehicles/ components/ parts/ assemblies etc. for which the Test Reports/ Extension reports/ Developmental test reports is /are issued.
6. ICAT is no way responsible for any misuse or copying any design/type/system in connection with entire vehicle/ components/parts and assemblies covered under the Test Reports/ Extension reports/ Developmental test reports is /are issued
7. Breach of any statutory provisions, of Indian laws or laws of other countries, will be sole responsibility of the customer. ICAT shall not be liable for any claims or damages made by the customer, whatsoever. The customer shall alone be liable for the same and undertakes to indemnify ICAT in this regard
8. Further, ICAT has the right, but not under obligation to initiate cancellation / withdrawal of the Test report/Extension/ Developmental test report is/are issued, in case of any fraud, misrepresentation, when it surfaces and comes in the knowledge of ICAT
9. No extract, abridgment or abstraction from this test report may be published or used to advertise the product without the written consent of the Director, ICAT, who reserves the absolute right to agree or reject all or any of the details of any items of publicity for which consent may be sought

The appropriate local court at Gurgaon shall have the jurisdiction in respect of any dispute, claim or liability arising out of this report.

Prepared By	Checked By	Department Head	
			
UDIT KAUL	MAHENDAR PAL	MADHUSUDAN JOSHI	Page 2 of 3 (42538)

C T 2 L L 0 0 4 7

Date: 21.01.2016

Annexure I

Sr No	Test	Test Requirements	Observations / Results
1	Burst Test [5.2 of IS 15722:2006]	Minimum burst pressure shall be 4.8 MPa (48.0 bar) for type2.	Hose withstood 89 bar Satisfactory


Prepared By 	Checked By 		Department Head  MADHUSUDAN JOSHI	Page 3 of 3 (42538)
UDIT KAUL	MAHENDAR PAL			

Page 1 of 1

ISS. No.		TITLE : CNG HOSE ID 5/16" AS PER IS15722 TYPE 2									
ISSUE NOTE		DATE	CHD BY	APPL. BY	SCALE	N.T.S	DATE	THIS DRAWING AND DESIGN IS THE PROPERTY OF POLYHOSE INDIA (RUBBER) PVT. LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING.			
ALL DIMENSIONS ARE IN MM				VERIFIED BY	CHECKED BY	DRAWN BY	7.08.15	DWG No.	SHEET 1 OF 1	REV. No.	00
POLYHOSE INDIA (RUBBER) PVT. LTD. CHENNAI - 600 010 CUSTOMER NAME :											
MARKING DETAILS: POLYHOSE LOGO ID 5/16" MAX WP 21.5 BAR CNG HOSE AS PER IS15722 TYPE 2											
HOSE SPECIFICATIONS.											
(1) CONSTRUCTION OF CNG HOSE AS PER IS15722 TYPE 2											
(2) MIN. BURST PRESSURE : 48 BAR											
(3) MIN. BEND RADIUS : 95MM											



Handwritten signature

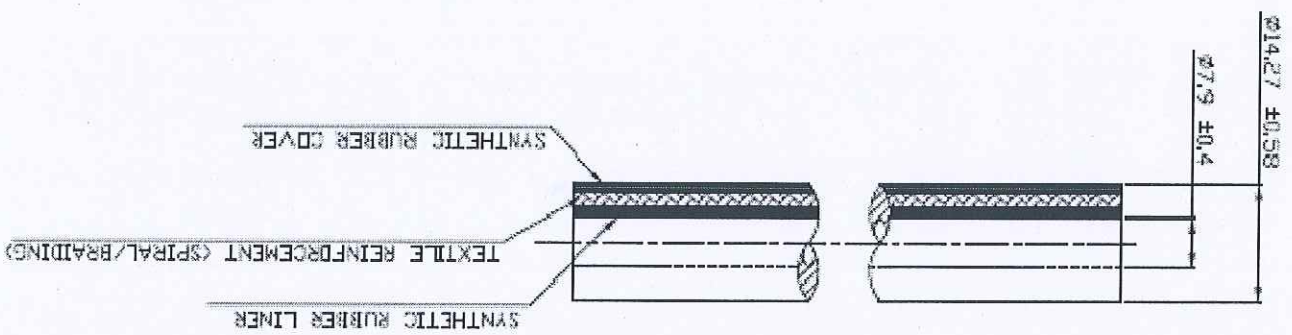

Test Report No: CH2110041 dated 21-01-16